

ALASKA NORTHERN LIGHTS, Inc.

Assembly Instructions for Floor Stand

Parts:

- "A" 2 wheel bases
- "B" 1 bottom cross support
- "C" 1 telescoping pole
- "D" 1 light box bracket
- "E" 1 small silver screw/nut
- "F" 1 two-headed black screw
- "G" 2 round screws (black heads)
- "H" Allen wrench

Tools Required: Philips screw driver and small wrench

Step 1:

Remove screws from "A" pieces, attach "B" to "A" pieces with screws.

NOTE: If you will be using the floor stand at its maximal height, attach "B" to the middle/front set of holes; if you will be using the floor stand while seated or lying down, attach "B" to the back set of holes.

Step 2:

Loosen screw on "C" and lengthen pole so bottom hole is clear. Tighten screw.

Step 3:

Place "C" onto silver post of "B", place allen wrench into hole at bottom of "C" and tighten.

Step 4:

Place "D" on top of "C", insert silver screw ("E") into top center hole (one side has a slightly larger hole, insert the screw into this hole first), place nut on end of screw and tighten slightly with wrench allowing for rotation/movement.


Step 5:

Insert and secure "F" into bottom center hole, making sure that "F" is inserted the same direction that "E" was inserted above.

Step 6:

Make sure the holes that attach "D" to light box are positioned at the back of the stand. If they are not, loosen "C" and rotate "D" 180 degrees. Attach and secure light box to stand with the 2 round screws ("G").

A A B G-H C E-F D

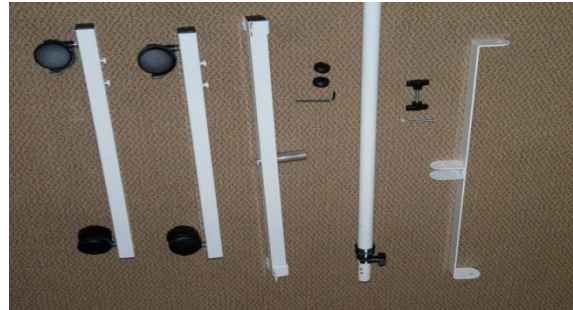


Step 1



Step 2-3



Step 4

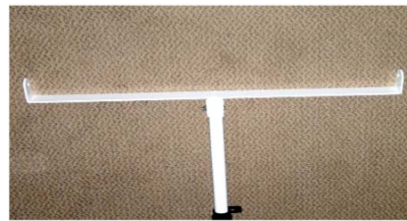

Step 5



Step 6

